



Bodpave 40 - Installation Guide

The 'Reduced Dig' method of installation for BodPave®40 is suitable for pedestrian and light vehicle applications where firm ground conditions already exist. It is particularly advantageous where there are budgetary limitations, restrictions on excavation due to SSSI conservation and archeological issues or TPO's (tree preservation orders).

Benefits

- Gravel & Grassed Surfaces
- Minimal site preparation or variation to existing levels
- Reduced installation time and costs
- Reduced import of materials and disposal of debris
- Rapid establishment and usage of site after installation
- Compliant with current guidance for Sustainable Urban Drainage Systems (SUDS)
- Suitable for grass or gravel surfaces

Applications

- Light vehicle parking and access routes
- Pedestrian access
- Cycle routes
- Golf buggy paths and Tow paths
- Caravan and Leisure site access routes
- Wheelchair and disabled access (DDA compliant)
- Light aircraft parking and taxiways

Site Suitability

- Where existing ground conditions are firm (ie: CBR > 7%) or where a hardcore/stone base already exists.
- Where trafficking is irregular or occasional
- Where loads will not exceed that of cars and light vans

BodPave®40, Geogrid and Geotextile specification details are available on request.



Green-tech endeavour to ensure that the information given on this technical data sheet is accurate, but accept no liability for its use or its suitability for particular application.

Rabbit Hill Business Park, Great North Road, Arkendale, Knaresborough HG5 0FF

T: 01423 332100

E: sales@green-tech.co.uk

W: www.green-tech.co.uk

Facebook: @greentechuk

Twitter: @greentechltd



Installation Guide

After confirming that the ground conditions are suitable for this type of 'reduced dig' application, the following method of installation should be followed.


Grassed Surfaces

1. Cut the grass closely to the surface or where necessary remove the turf and topsoil to a depth of <70mm and dispose of all debris. Level the formation layer and lightly consolidate.
2. Install edge retaining boards or kerbs if required.
3. Place a layer of geogrid on the formation layer and ensure that it is flat to the surface by pinning as required.
4. Place a 30mm thick layer of 5-20mm diameter gravel / angular aggregate evenly over the geogrid. The geogrid must not be allowed to become exposed above the gravel / aggregate layer.
5. Place the BodPave®40 pavers onto the screeded gravel / aggregate layer. Connect the pavers using the ground spikes and loops, progressing over the area in rows. Use protective gloves to avoid abrasions.
6. Pavers can be cut using a hand or power saw to fit around obstructions and curves. Cut pieces which are less than half the original size should be avoided where possible. Pavers can be firmed in place using a light vibrating whacker plate if required.
7. Fill pavers with the specified propriety rootzone. Finished levels should be 5-7mm below the top of the cells after settlement. Do not overfill the paver cells. A light vibrating plate can be used to consolidate the pavers and to settle the rootzone infill if required.
8. Rootzone must be a free-draining structurally sound sand:compost or sand:soil blend. This is a nominal propriety blend of 60:40 or 70:30 ratio. Self blending is not recommended.
9. Carry out a normal seeding, fertilising and watering programme. A very light top dressing may be applied to just cover the seed and to provide adequate germination conditions. Do not overfill the paver cells. Alternately thin-cut turf can be rolled into the surface if required
10. The surface may be trafficked immediately, but it is preferable to allow the grass to fully establish prior to use.

Gravel Surfaces

After confirming that the ground conditions are suitable for this type of 'reduced dig' application, the following method of installation should be followed.

1. Follow steps 1-6 above. Note: an optional geotextile fabric layer can be placed onto the formation layer prior the geogrid installation to prevent migration & contamination.
2. Fill the pavers with the specified gravel or angular aggregate. Preferably a clean, well graded angular material within the range of 5 -14mm diameter. Fully rounded 'pea gravel' is not recommended.
3. Consolidate the surface using a light vibratory whacker plate if required.
4. Refill any localised low areas with gravel and repeat consolidation until satisfied with final compacted finish.
5. The surface can be trafficked immediately.

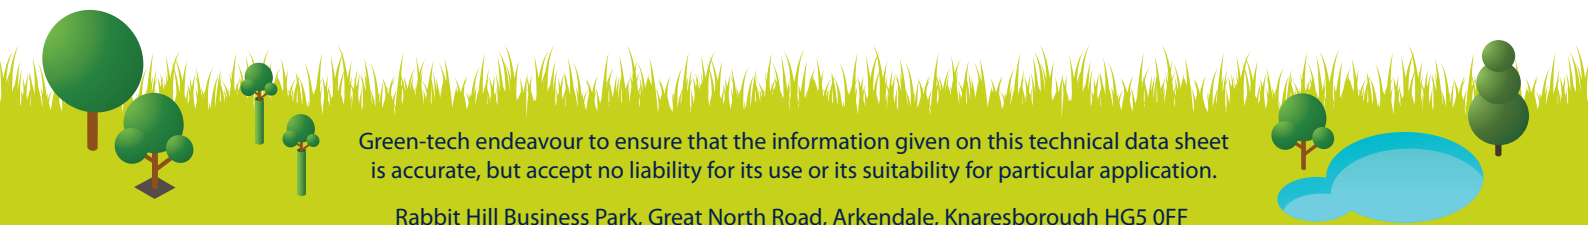

Green-tech endeavour to ensure that the information given on this technical data sheet is accurate, but accept no liability for its use or its suitability for particular application.

Rabbit Hill Business Park, Great North Road, Arkendale, Knaresborough HG5 0FF

T: 01423 332100 E: sales@green-tech.co.uk W: www.green-tech.co.uk Facebook: @greentechuk Twitter: @greentechltd



Paving Grid Specification

Description	Data
Product Material Colour Paver Dimensions Paver Size Laid Nominal Cell Size Cell Wall Thickness Weight Load Bearing Capacity Central Base Support Open Cell % Connection Type Chemical Resistance UV Resistance Toxicity	BodPave®40 Rigid 100% recycled polyethylene Green 500mm x 500mm x 40mm 500mm x 500mm (4 grids per m2) 60mm Octagonal 2.7mm - 3.2mm 1.2kg/paver - (4.80kg/m2) 150 tonnes/m2 (Crush resistance) 25mm long pegs on underside (4 per paver) Top 95% / Base 75% Spike and loop edge connection Excellent High Non Toxic
Bedding Layer	60:40 rootzone : 50-70mm thick
Paver Fill (seed bed)	60:40 rootzone : 33-35mm thick
Grass seed or turf	35g/m2 amenity blend low maintenance seed or turf as required.
Fertiliser	Pre-seed fertiliser followed up with appropriate seasonal fertiliser.
Sub-base type	DoT Type 3 or a modified porous sub-base. DoT Type 1 with drains
Sub-base reinforcement	TX160 Triaxial Geogrid

Green-tech endeavour to ensure that the information given on this technical data sheet is accurate, but accept no liability for its use or its suitability for particular application.

Rabbit Hill Business Park, Great North Road, Arkendale, Knaresborough HG5 0FF

T: 01423 332100 E: sales@green-tech.co.uk W: www.green-tech.co.uk Facebook: @greentechuk Twitter: @greentechltd



Field Guidance for Estimating Sub-Grade Strengths

Consistency	Indicator			Strength	
	Tactile (feel)	Visual (observation)	Mechanical (test)	CBR	CU
			SPT	%	kN/sqm
Very Soft	Hand sample squeezes through fingers	Man standing will sink >75mm	<2	<1	<25
Soft	Easily moulded by finger pressure	Man walking sinks 50-75mm	2-4	Around 1	Around 25
Medium	Moulded by moderate finger pressure	Man walking sinks 25mm	4-8	1-2	25-40
Firm	Moulded by strong finger pressure	Utility truck ruts 10-25mm	8-15	2-4	40-75
Stiff	Cannot be moulded but can be indented by thumb	Loaded construction vehicle ruts by 25mm	15-30	4-6	75-150

Green-tech endeavour to ensure that the information given on this technical data sheet is accurate, but accept no liability for its use or its suitability for particular application.

Rabbit Hill Business Park, Great North Road, Arkendale, Knaresborough HG5 0FF

T: 01423 332100 E: sales@green-tech.co.uk W: www.green-tech.co.uk Facebook: @greentechuk Twitter: @greentechltd