



gtEdgeGuard

Applications:


- Designed for use in variety of green or ballasted roof applications
- Can be used either as an edge restraint, or where a solution for retaining or separating the roof garden materials is required

Features:

- Supplied in 2.4m lengths - quick installation
- Lightweight and robust, can be cut to length
- Available powder coated in any colour
- Unique connection system
- Can be angled to suit the roof design

Aluminium pre-punched and profiled.

Code	Height (mm)	Width at base (mm)	Length of section (mm)
EG-A-50/2400	50	100	2400
EG-A-75/2400	75	100	2400
EG-A-100/2400	100	100	2400
EG-A-120/2400	120	100	2400
EG-A-150/2400	150	150	2400
EG-A-200/2400	200	150	2400
EG-A-250/2400	250	200	2400
EG-A-300/2400	300	200	2400

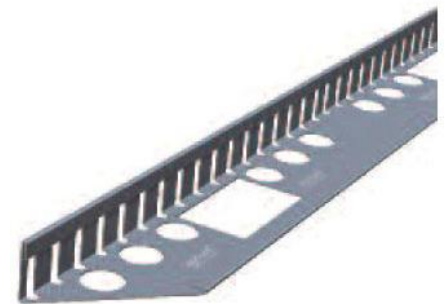

Aluminium pre-punched and profiled.

Code	Height (mm)	Width at base (mm)	Length of section (mm)
EG-F-50/2400	50	100	2400
EG-F-75/2400	75	100	2400
EG-F-100/2400	100	100	2400
EG-F-120/2400	120	100	2400
EG-F-150/2400	150	150	2400
EG-F-200/2400	200	150	2400
EG-F-250/2400	250	200	2400
EG-F-300/2400	300	200	2400



Green-tech endeavour to ensure that the information given on this technical data sheet is accurate, but accept no liability for its use or its suitability for particular application.

Rabbit Hill Business Park, Great North Road, Arkendale, Knaresborough HG5 0FF

T: 01423 332100 E: sales@green-tech.co.uk W: www.green-tech.co.uk Facebook: @greentechuk Twitter: @greentechltd