



Type 2 Frame and Guard Installation Guide

A type 2 and guard installation is required when either a two piece or four piece grille is used with a tree guard.

gtSupport Frames should be installed with gtDales Collection Grilles to stabilise grilles and to help prevent shrinkage and subsidence of the tree pit. gtSecurity Clamps secure the individual sections of the tree grille to each other and to the support frame which increases rigidity of the whole unit and prevents removal of grille sections.

Installation:



Step 1: Bolt the inner sections into the outer halves, it is essential that the inner sections are toe down to ensure the grille fits flush.

Step 2: Place the tree guard halves onto the flat surface of the type 2 frame inners, ensuring that bolt holes in the guard and frame are aligned. Bolt the guards down using the fixings provided.

Step 3: Bolt the two completed halves together around the tree.

Step 4: Place tree grille into frame.

Step 5: Apply security straps if applicable.

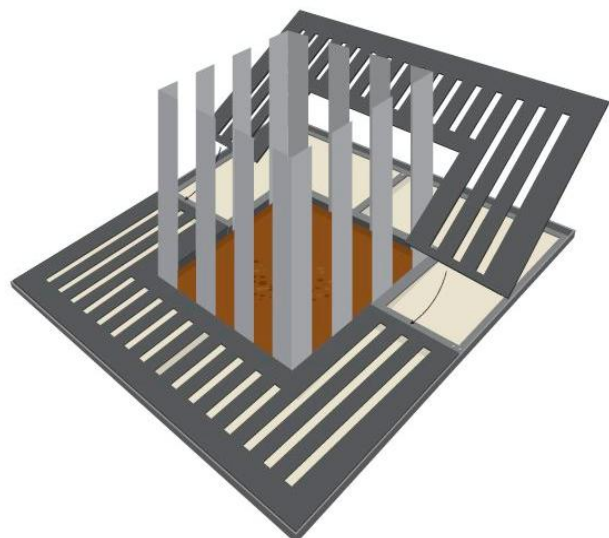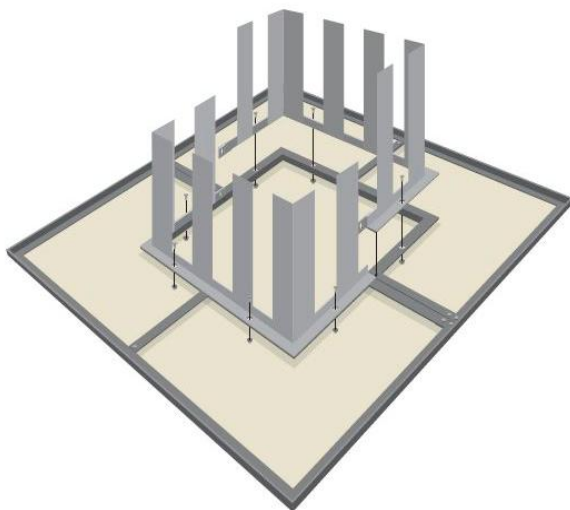

Green-tech endeavour to ensure that the information given on this technical data sheet is accurate, but accept no liability for its use or its suitability for particular application.

Rabbit Hill Business Park, Great North Road, Arkendale, Knaresborough HG5 0FF

T: 01423 332100 E: sales@green-tech.co.uk W: www.green-tech.co.uk Facebook: @greentechuk Twitter: @greentechltd