

TP COMBIGRID

REINFORCED VERTICAL PRESSURE DISTRIBUTING CLOTH

Urban Tree Planting
& Tree Irrigation

TP Combigrid

Type:	TP Combigrid 100
	TP Combigrid 130
	TP Combigrid 150
	TP Combigrid 170
	TP Combigrid 200
Materials:	Fibreglas, bitumen, polyethylene (PE)
Weight:	310 gr/ m ²
Aperture grid size:	12 x 12 mm
Maximum days between installation and covering up:	2 weeks
Roll measurements:	Diameter: ca. 45cm
	Width Weight
TP Combigrid 100	1m 31kg
TP Combigrid 130	1.3m 39kg
TP Combigrid 150	1.5m 50kg
TP Combigrid 170	1.7m 56kg
TP Combigrid 200	2m 62kg
Quantity per roll:	100m
HS code:	70199000

Specifications

Tensile strength MD + CMD

≥ 35 kN/m -5 kN/m (EN ISO 10319)

Strain at nominal strength

≤ 3% (EN ISO 10319)

Dynamic perforation (cone drop test)


17 mm + 1 mm (EN ISO 13433)

Water permeability vertical

57 l/s/m² -5 l/s/m² (EN ISO 11058)

Design life:

- 50 years

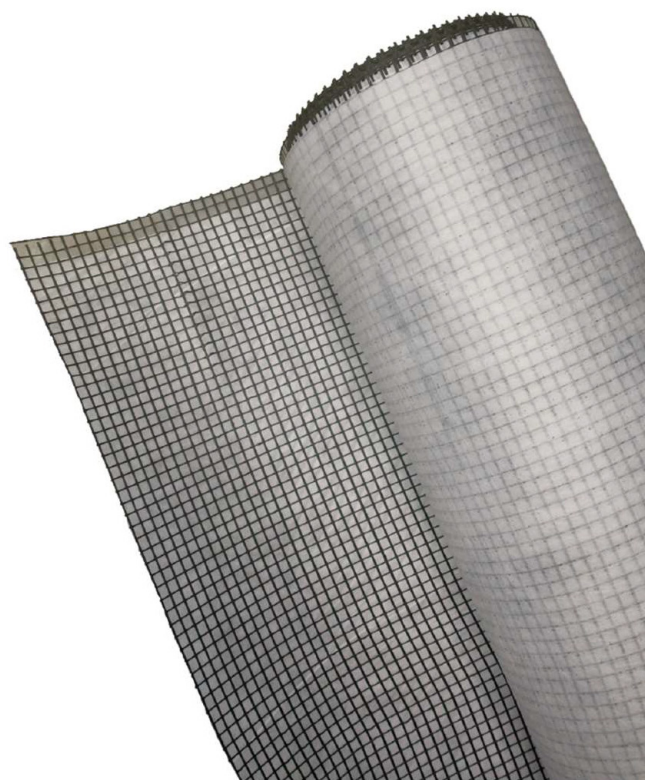

Approved to the ISO 9001 Quality Management System Standard:

The information set forth in this data sheet reflects the best knowledge at the time of publication. The document is subject to change pursuant to new developments and findings. The same reservation applies to the properties of products described. No liability is undertaken for results obtained by usage of the products and information.